

2023



reetop Adventure Park equipment supplier

中華體驗學習發展協會

80347高雄市左營區富民路435號5樓之9

www.pataiwan.org

07-5569161 . 0921859888

無結網/鑽石型網

Net without knots for more comfort.
Net rope diameter: 10 mm, 12 mm,
16 mm or 20 mm.





Peripheral
rope to
attach
the net

爬網或泰山跳網

We make all sorts of rope nets
Ø 16 mm or 20 mm.

Different mesh sizes: 250 mm or 300 mm.

Different mesh shapes: rectangular
trapeze - circular.

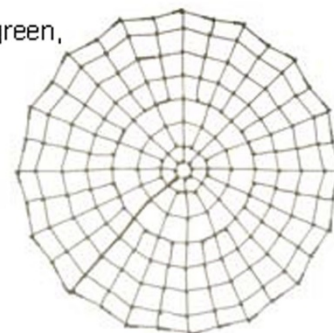
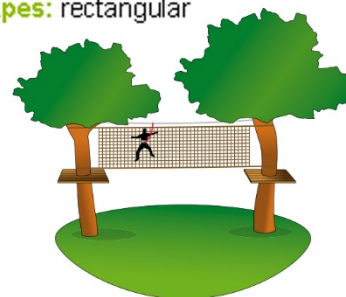


Color: green,
beige
or tan.

網 橋

without knots


Polypropylene net, braid 5 mm. 30 mm square mesh.
Mass-coloured beige. Peripheral bolt rope Color white.

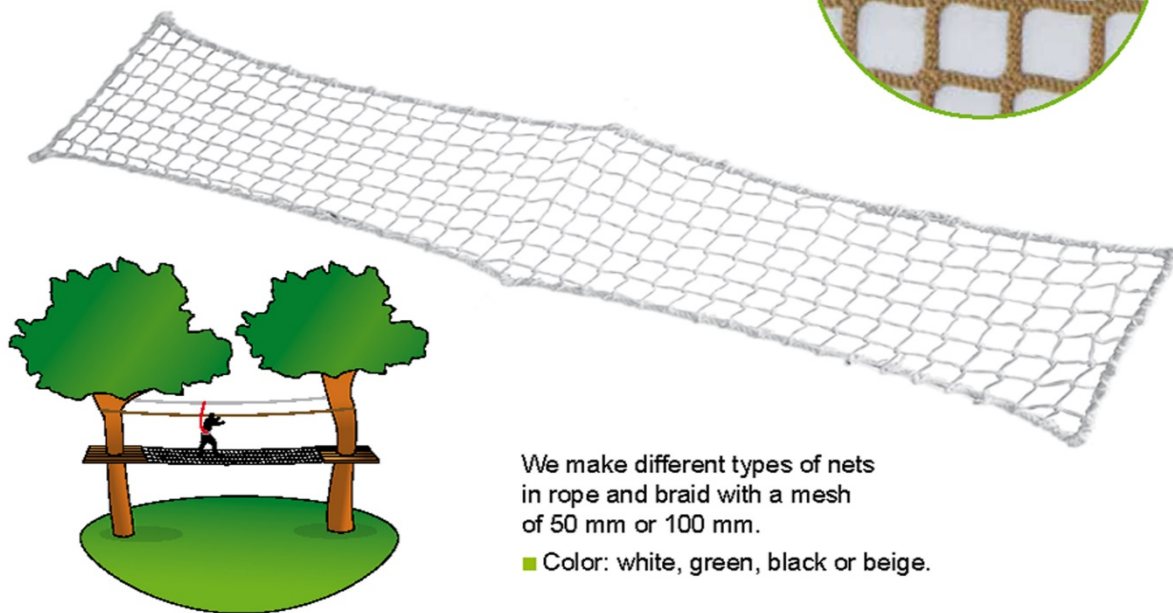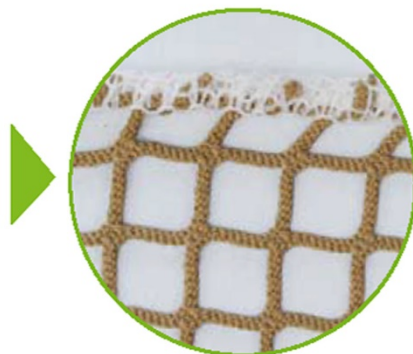

We make different types of nets
in rope and braid with a mesh
of 50 mm or 100 mm.


■ Color: white, green, black or beige.

橫 渡 爬 網(附 環)

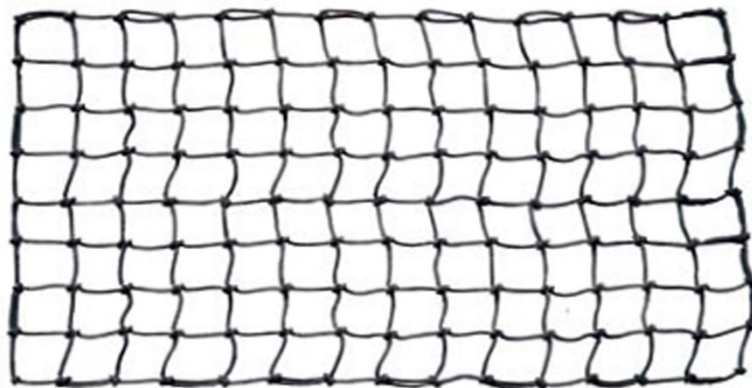


Polypropylene Net, Ø 16 mm, 250 mm square mesh with a ring on each corner.

■ Standard color: black.

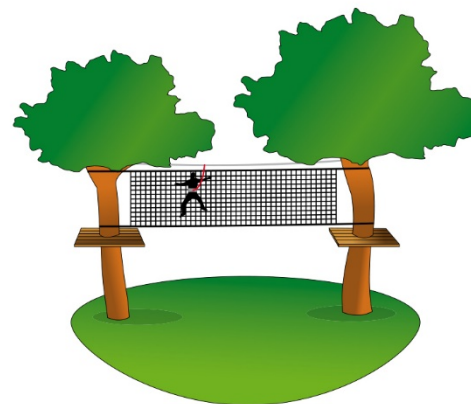

猴 網 橋

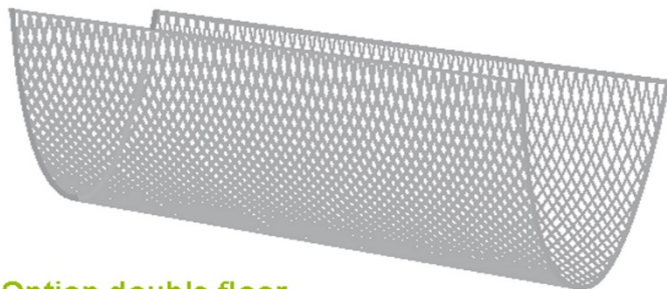


Option double floor



Net

- Braid: 4 mm or 4,75 mm.
- Mesh: 50 mm.
- Bolt rope sewn around the edge of the net.
- Color: green, white or black.


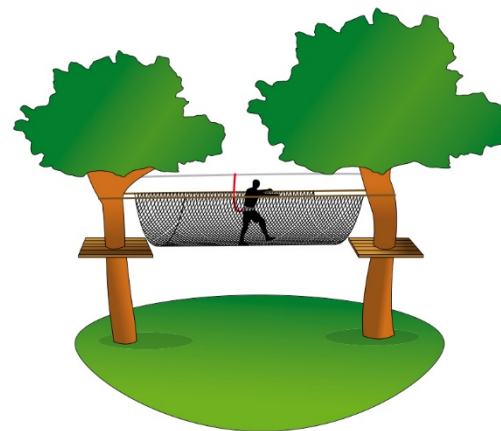


Option strop with thimble

Multi-purpose and easy assembly. Color white.



飛網

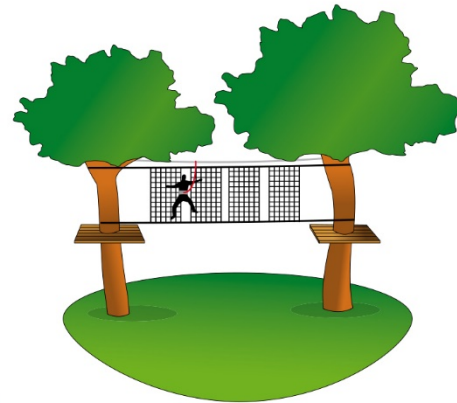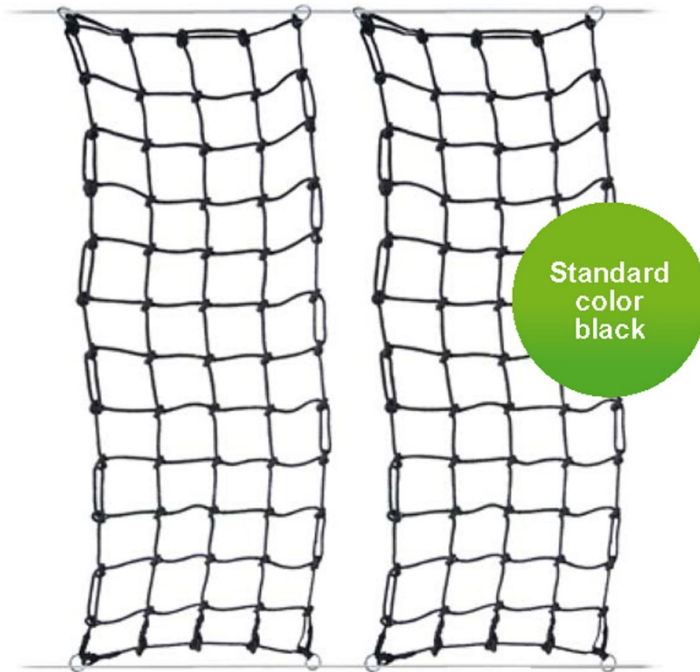

Polypropylene Net, Ø 16 mm, 250 mm square mesh with a ring on each corner.

■ Standard dimension in stock:
3 m x 1 m.


錐體網(金字塔)

Composed of:

- 1 wood base treated autoclave class 4.
- 4 support bars.


Dimension at the floor 80 x 80 cm.

Height
2,10 m

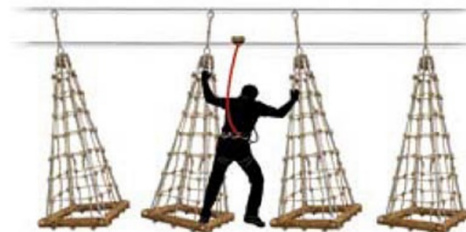


叢林軌道

- Round steel tube Ø 800 mm. Color grey.
- Steel bar (tube) straight or curved.
- Mesh net size 100 mm, without knots, black polythene.
- Cord size Ø 12 mm.

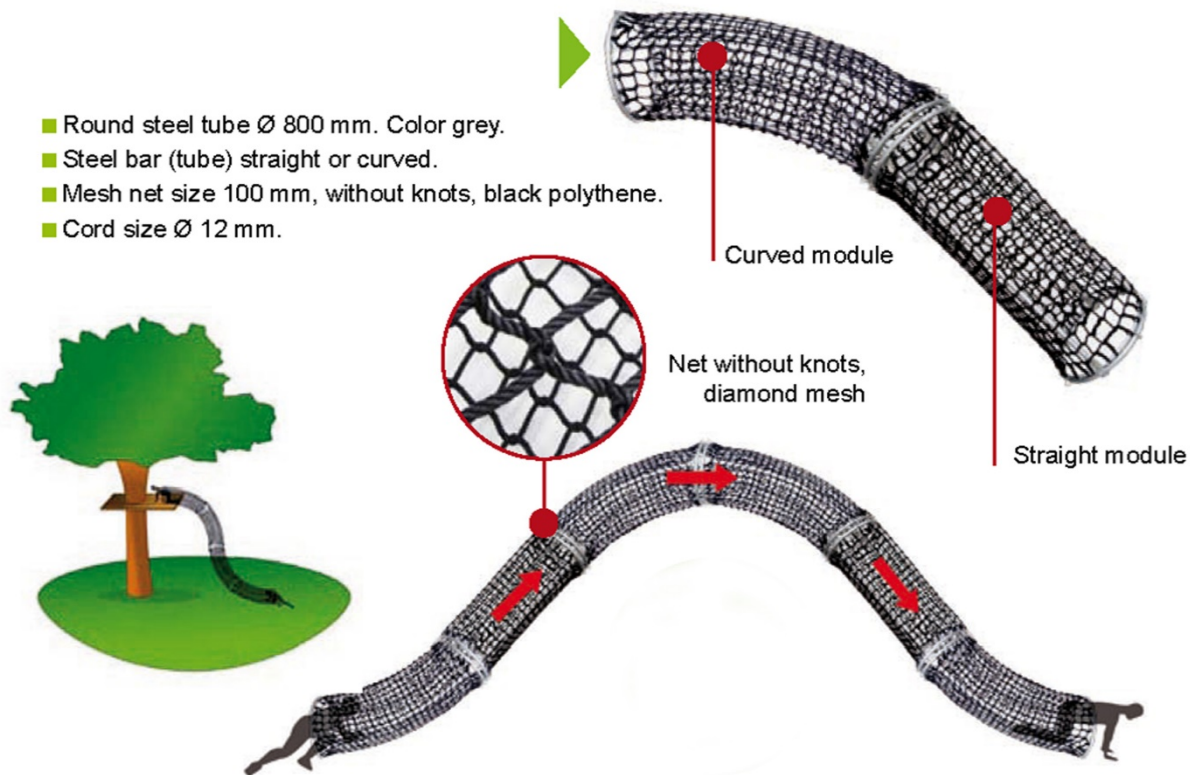


網 洞 穿 越

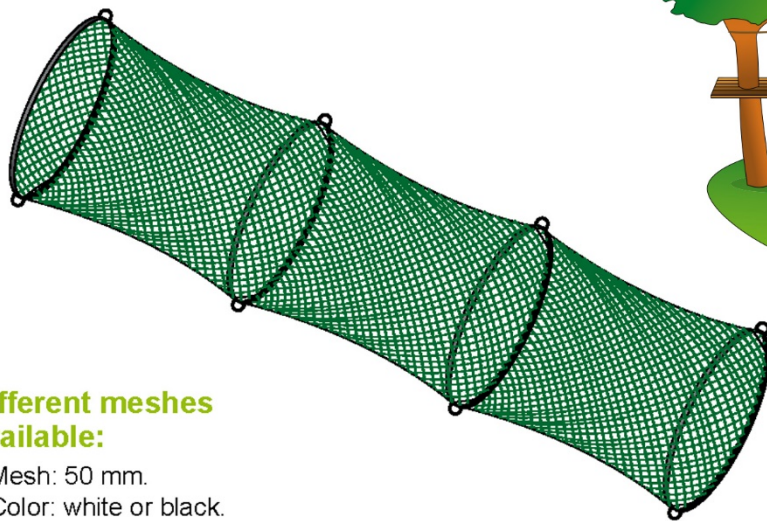

Different meshes available:

- Mesh: 50 mm.
- Color: white or black.
- Double mesh: 70 mm.
- Color: green.
- Mesh: 250 mm.
- Color: green or beige.

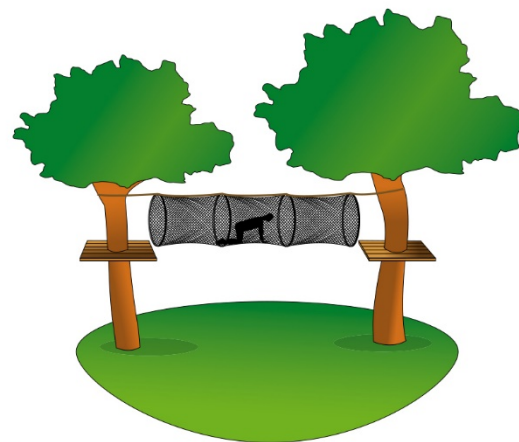

Net tube

- Equipped with a steel circle Ø 800 mm every meter.

旋轉門

Dimensions:
Height 2 meters
Width 1 meter.


With a top and
bottom pivot with
360° rotation.



Directions for use

Obstacles on Chinese bridges.

煙 囪 爬 網

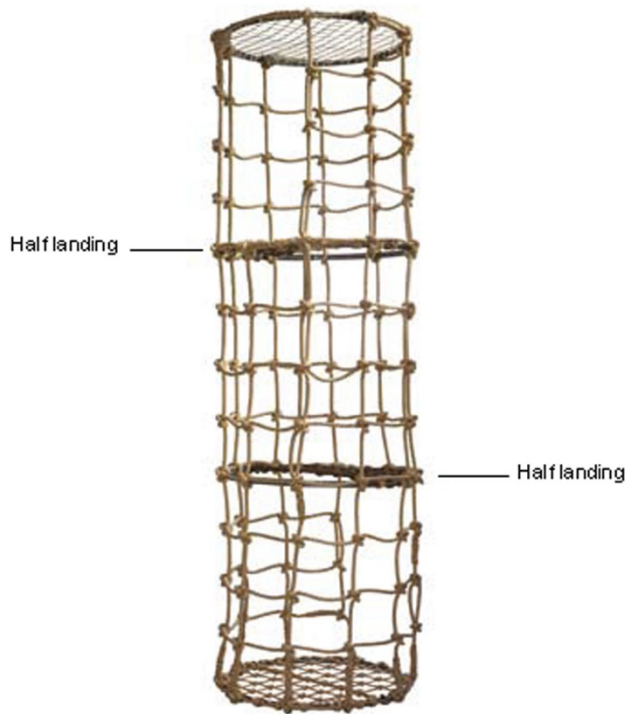

Rope Ø 16 mm

- Square mesh: 250 mm.
- Equipped with a half landing every meter.
- In rope Ø 12 mm, mesh 100 mm, attached in a staggered fashion. Color: black.
- Diameter of the chimney: 800 mm.
- Color: green or beige.

趣味箱



Manufacturing custom net cages with landings, labyrinth, partitions to move safely. Suitable for childrens and adults.



Game without harness

不用安全吊帶的設施

We make custom nets in polyamid, 50 mm mesh or 100 mm for course without harness.



Remarks

The floor net in 50 mm mesh has to be positioned at 1 m max under the game or platform.
The side net in 100 mm mesh should have a height 2,50 m.

蜘蛛箱

Wooden box autoclave class 4, fixed on a nonslip floor. Dimensions: length 0.80 m, width 0.60 m - height 0.62 m.



Sandow Ø 9 mm

20 m. Color black.


This box is supplied with assembly accessories and sandow, allowing you to create and customize your game module.



大腳爬梯

Foot-shaped nonslip floor, attached to 2 logs Ø 100 mm. \varnothing mm.
Positioning of 2 cables parallel to the left and right
of the game module.



Length 121 cm.
Width 63 cm.

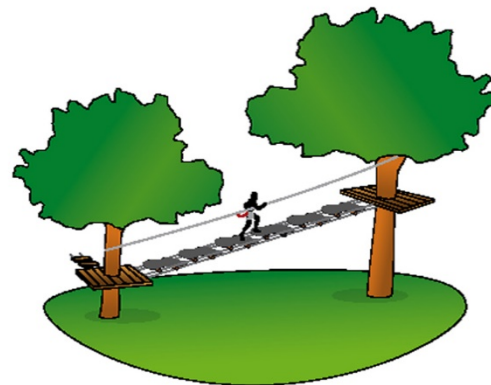

Easy access to the upper
level platform

獨木舟橋


Concave plank, treated autoclave class 4, to put on 2 cables. Each plank comes with 4 wire rope tighteners.

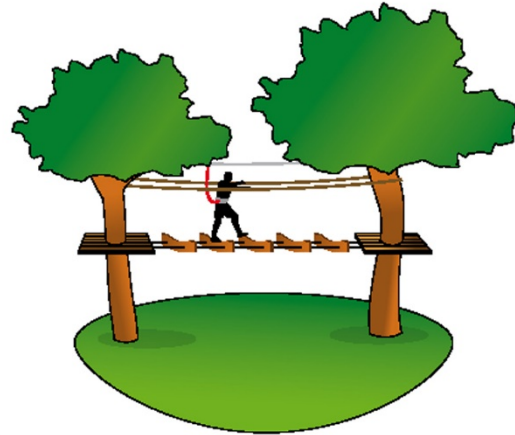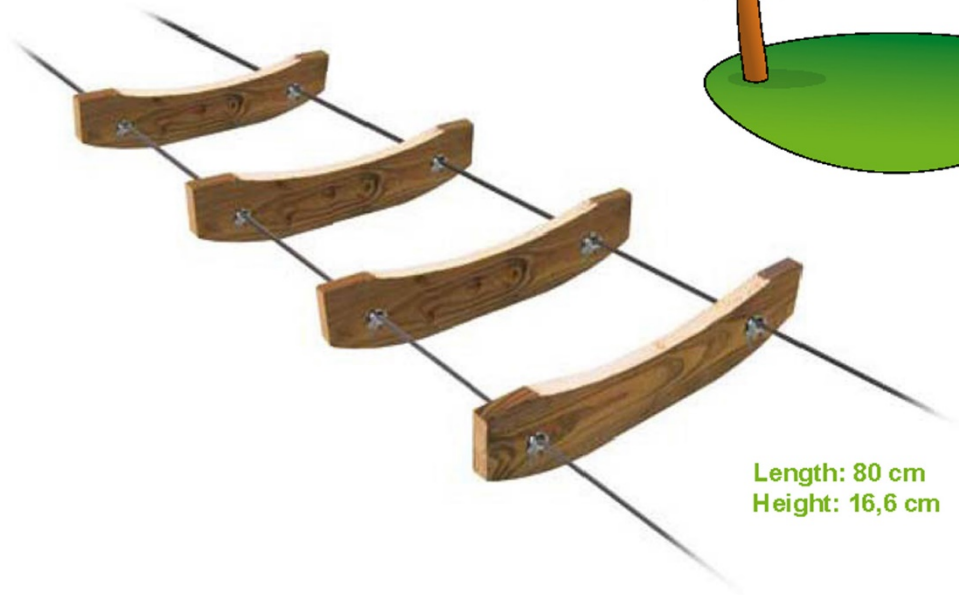


Length: 80 cm
Height: 16,6 cm

字母天橋

Customize your suspended bridge by displaying a theme, the color of your course, the name of your park, etc...

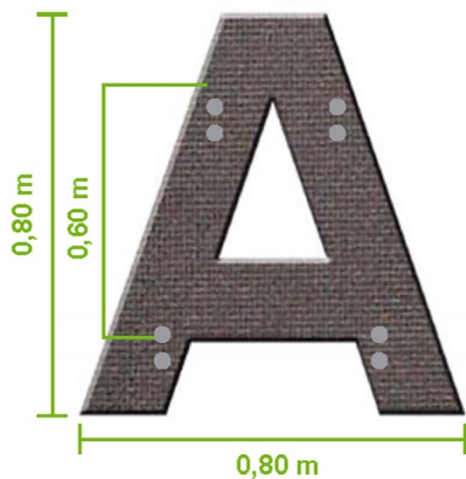


15 mm thick.
Supplied with assembly accessories.

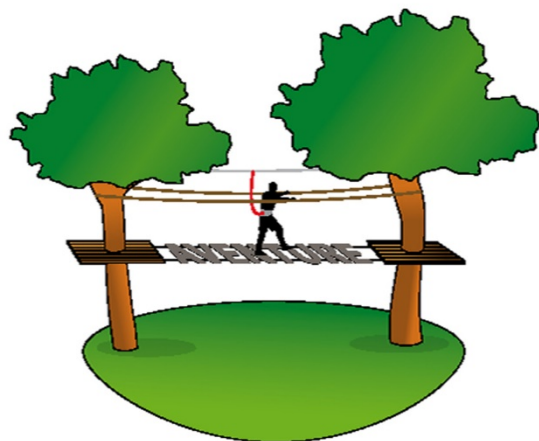

水手橋


«Polyform» boat fender, length 60 cm. The fender is assembled on 2 x Ø 16 mm polypropylene ropes, color green or beige, with thimble eye and ring at each end.

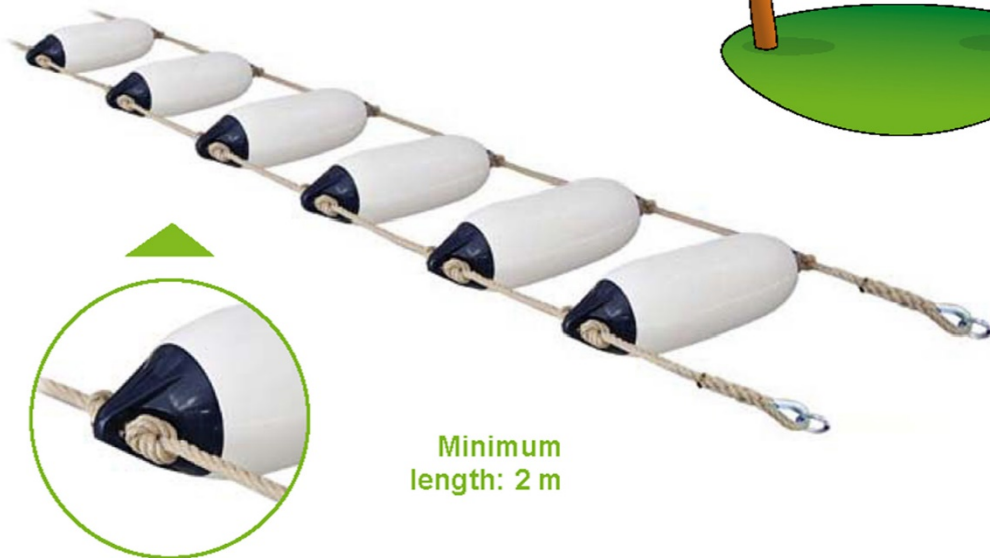

Minimum
length: 2 m


搖擺小子

«Polyform» boat fender, length 1 m. The fender is equipped with 2 x Ø 20 mm polypropylene ropes, color green or beige, with a thimble eye and ring at the top and a knot at the bottom.

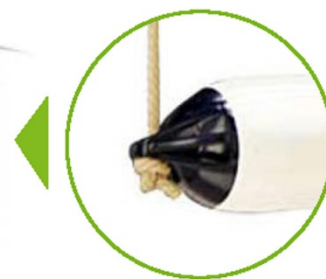


海盜障礙

«Polyform» boat fender, length 1 m. The fender is equipped with a Ø 12 mm elastic rope + a suspension ring at each end.

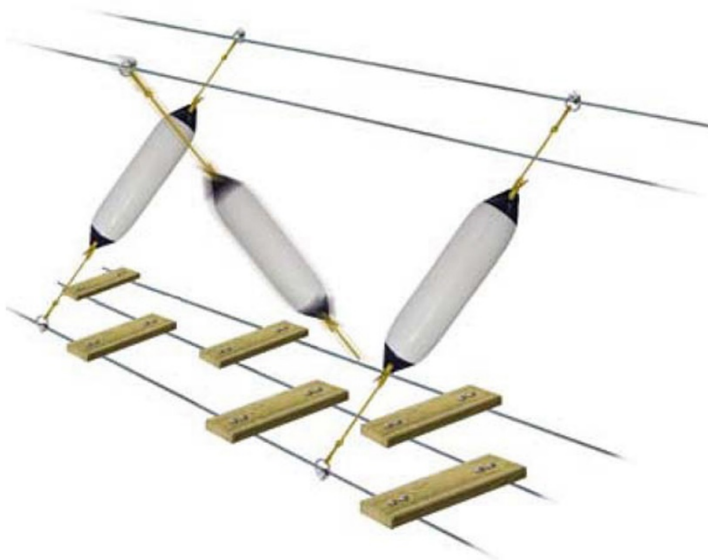


Directions for use

These obstacles can be combined with our Chinese bridge or with other game modules.

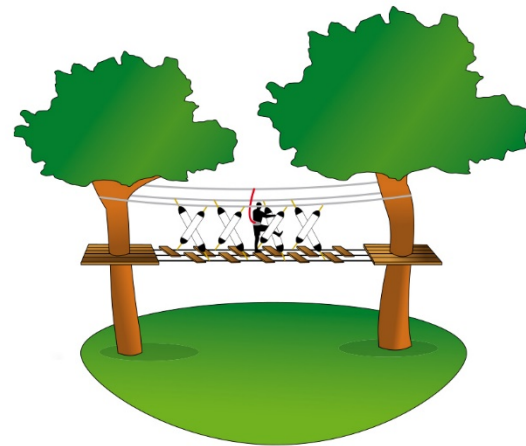


骨牌橋

Wood planks treated autoclave class 4, assembled on bearing. Automatic motion.

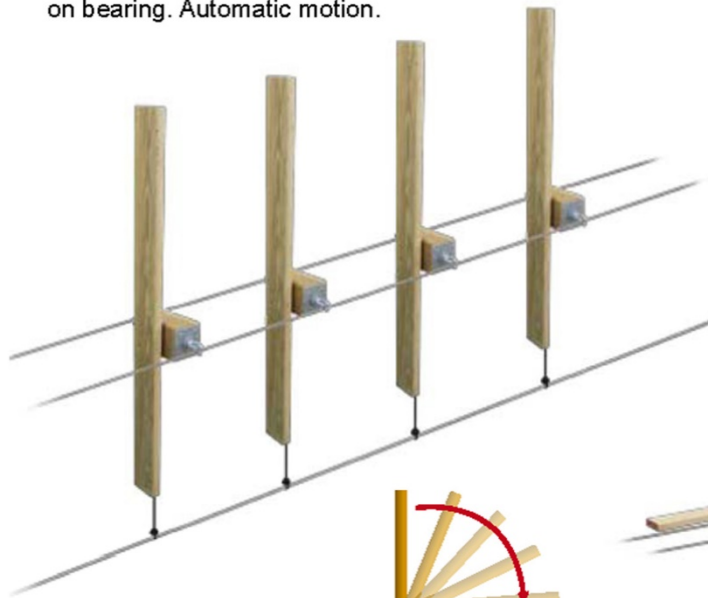

Length: 1 m.
Width: 90 mm.

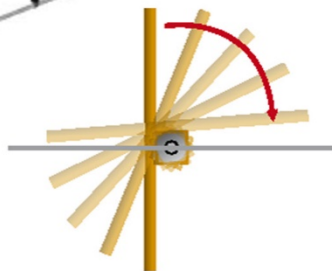

馬鞍橋




This kit consists of:


- ½ circle Ø 500 mm.
- 10 pre-drilled planks autoclave treated, class 4.
Length: 1 m.
- Comes with the required assembly accessories.



移動橋

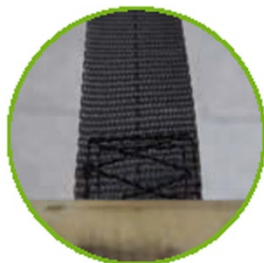

Sewn strap around
the threaded rod

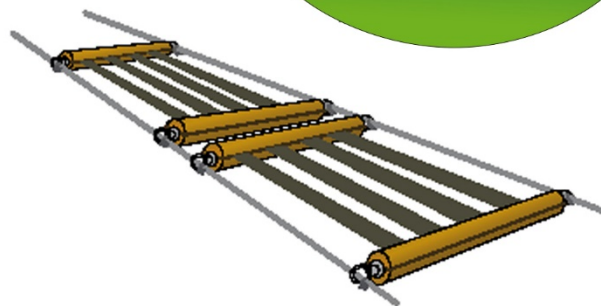

2 m wood element composed of:

- 4 straps 50 mm. Color black.
- 2 wood logs Ø 100 mm + threaded rod Ø 16 mm.
- 2 fixation rings at each end.

蘑菇橋



- Comes with assembly accessories.
- Hat Ø 400 mm.

磕 碰 橋


Inflatable 1/2 sphere. Color black.

To fix on wire ropes, Ø 600 mm. Comes with assembly accessories.



鬼 路

Suspended wood ghost head. Equipped with 2 galvanized chains. Plywood thickness: 15 mm.

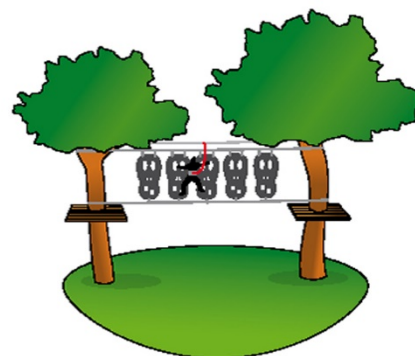

Option



Galvanized chain to attach the different modules together, supplied with quick links.

Length: 1 m.

迴轉爬梯

Easy and quick assembly

Build your own stairs to get to the platforms.
Treated timber class 4. Length 60 cm.
Plank Thickness: 27 mm.

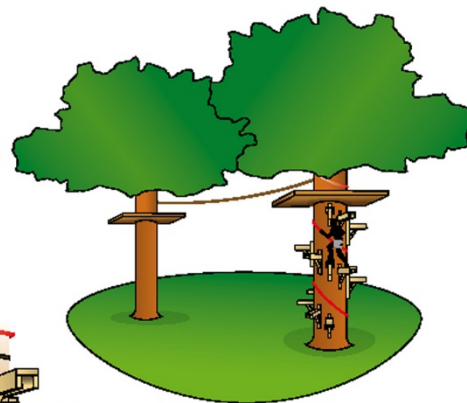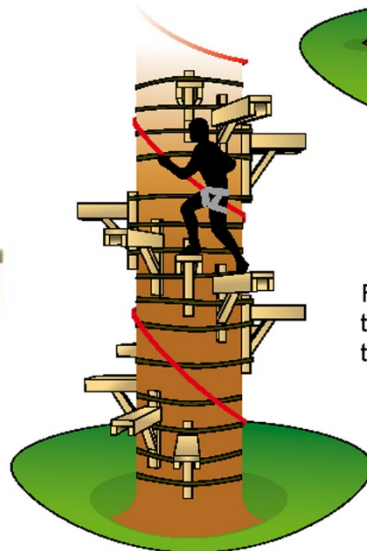


Ratchet strap
to attach
the stairs.



高 蹺 路

Beech wood log Ø 100 mm, treated autoclave class 4. Length 0,66 m.
Small walking log Ø 35 mm.

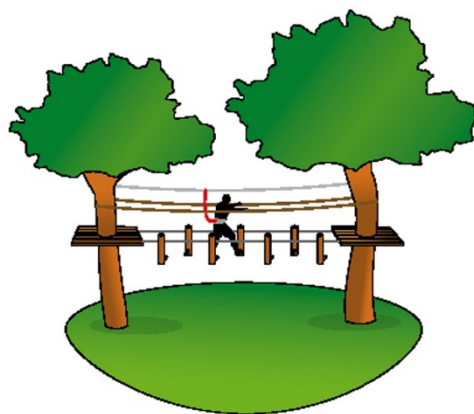


Assembly accessories are included.


巨 人 之 路

Log Ø120 mm treated timber class 4.
Length: 0,50 m to fix vertically on 2
wires spaced of 0,3 m.

Supplied with 4 wire rope
tighteners 10 mm.

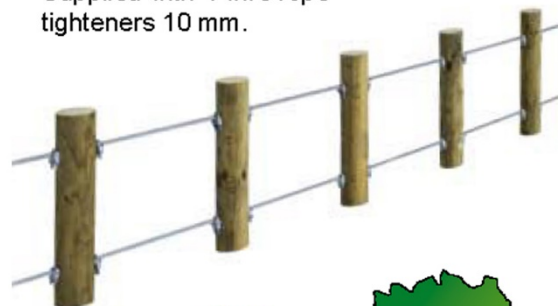

桶 橋

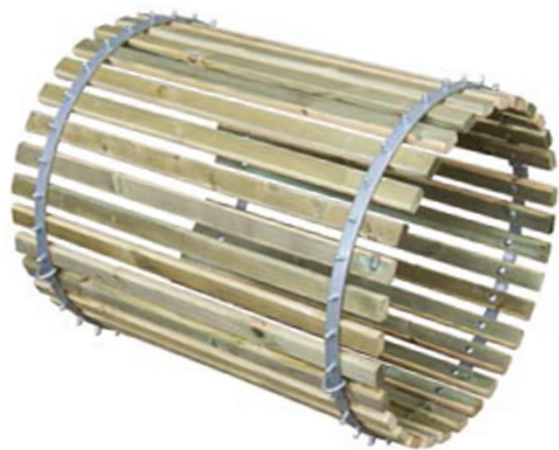

Composing:


- Circles Ø 800 mm.
- Wooden slats, treated timber class 4, pre-drilled with regards to length required.
- Necessary assembly accessories are included.



Standard lengths:

1 m || 1,50 m || 2 m || 2,50 m.

不均勻的圓

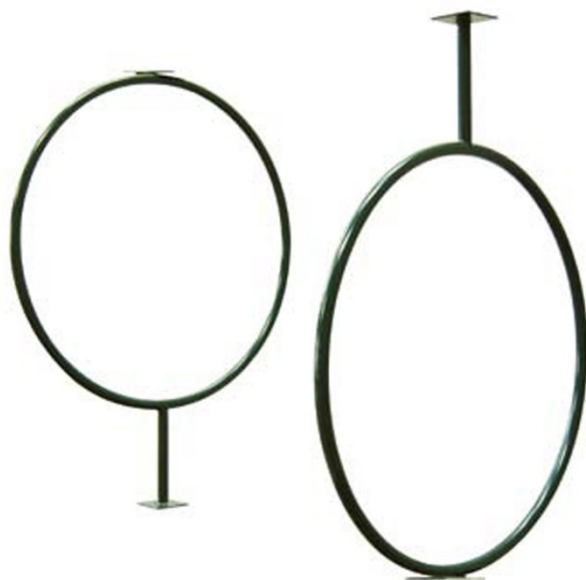

Steel circle Ø 1 m with a 30 cm tube welded to it

- Equipped with 2 plates welded to the circle for attaching the wire rope.
- To be installed in a staggered fashion.

波浪橋

Wave bridge, made with steel plate curved covered with gray plastic and fixed on grooved boards with bolts. The gateway is equipped with a rope suspension, Ø 16 mm, color green or beige.



Bridge width: 0,50 m.



Childrens course:

Adjustable rope suspensions
1,50 m to 2 m.

Adults course:

Adjustable rope suspensions
2,50 to 3 m.



Sold as an 5,40 m element
(double wave). Supplied
with link accessories.

天平橋


Wooden module treated class 4, lenght 2 m, made with a grooved wooden plank, attached to a hinge galvanized steel. Place the bridge on two ropes with a spacing of 40 cm between them.

Supplied with assembly accessories.




東方橋

Grooved wooden planks treated class 4 to assemble on 3 wire ropes. Supplied with fixing accessories and 2 spreaders of 1 meter with 3 drilling at each extremity.

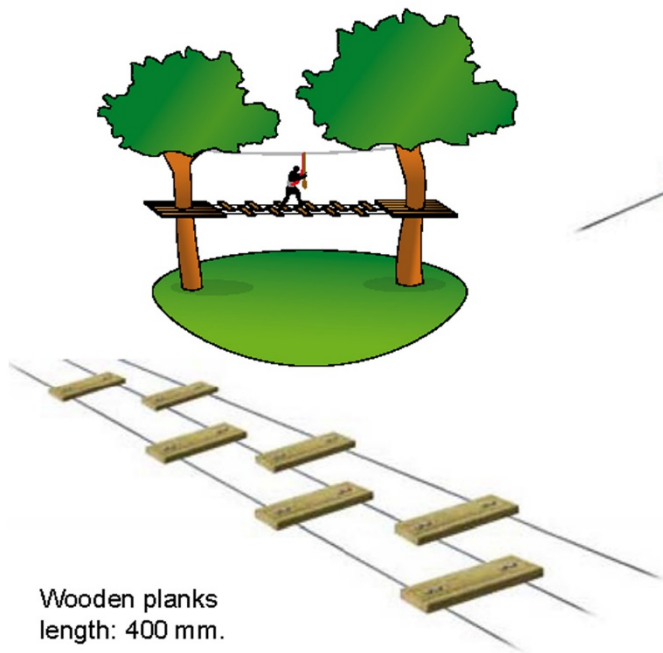

蛇橋


Including 2 grooved wooden plank treated class 4, one measuring 1,145 m and the other measuring 2 m supplied with accessories for assembly.

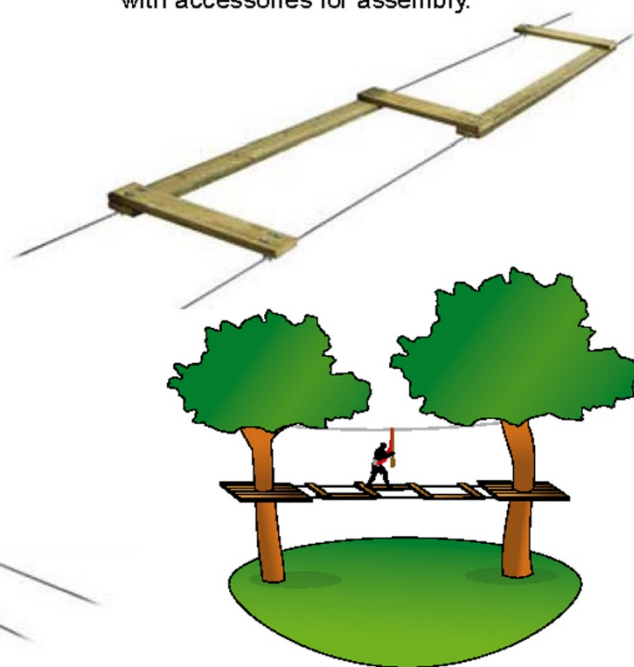

滾木橋

Log Ø 120 mm.


- Treated timber class 4.
- Equipped with ball bearings and rings for attachment to cable support.

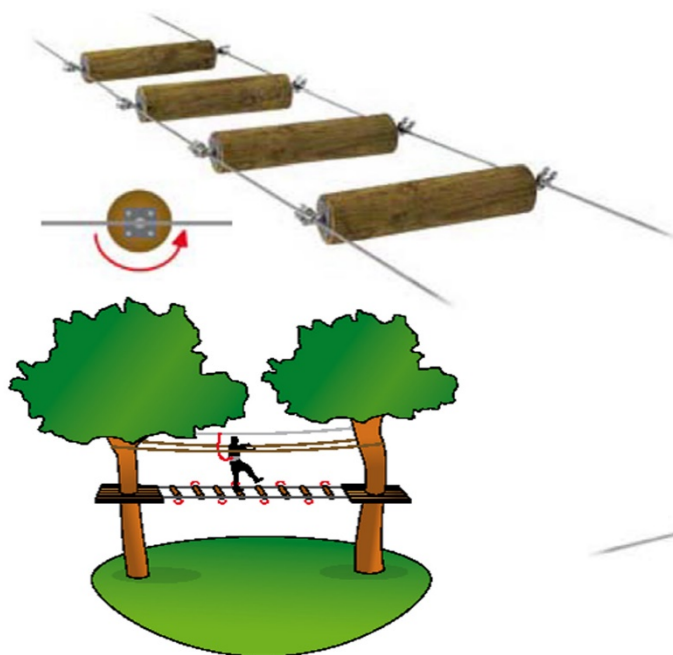

圓木橋

Log Ø 100 mm. Length 0,66 m.

- To fix on a wire rope into the log, supplied with 4 wire rope tighteners.

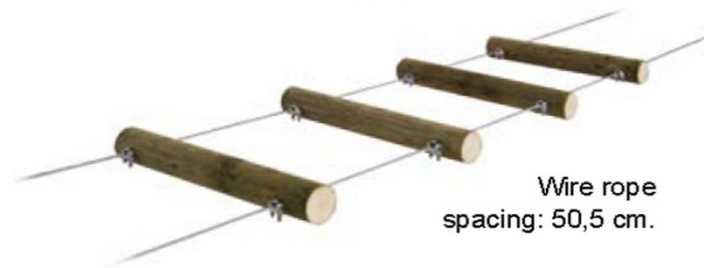

鐘 擺 橋

This new product has a foam density of 30 kg/m³ and is covered with a PVC tarpaulin. Equipped with a polypropylene (synthetic hemp) suspension rope Ø 20 mm. Length 2.50 m.



蔓 藤 橋

Foam obstacle Ø 10 cm. Each end is closed and equipped with a fixing ring.




■ Color green.

■ Length: 2 m.



礙腳橋

Foam obstacle covered with a PVC tarpaulin and equipped with Velcro to attach the obstacle to the plank

Thickness plank: 27 cm.
Length: 90 cm.
Width: 27 cm.

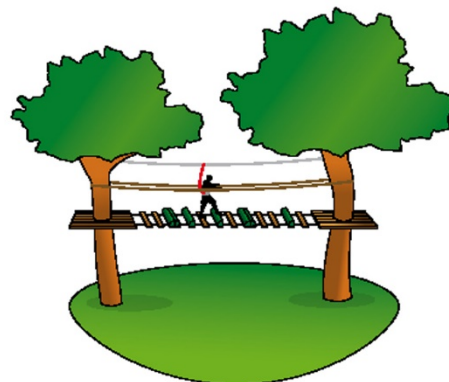

Comes with the required assembly accessories.

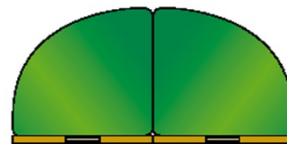

懸浮魚苗

Foam cylinder covered with a green PVC protection, provided with 4 hanger straps sewn on a ring.



Foams length: 1,50 m.



馬前卒

Hanging foam obstacle equipped with a suspension ring.




Foams length: 0,90 m.



入 迷 的 隧 道

This game allows children to have safe fun while passing through playful forms: animals, fruits...

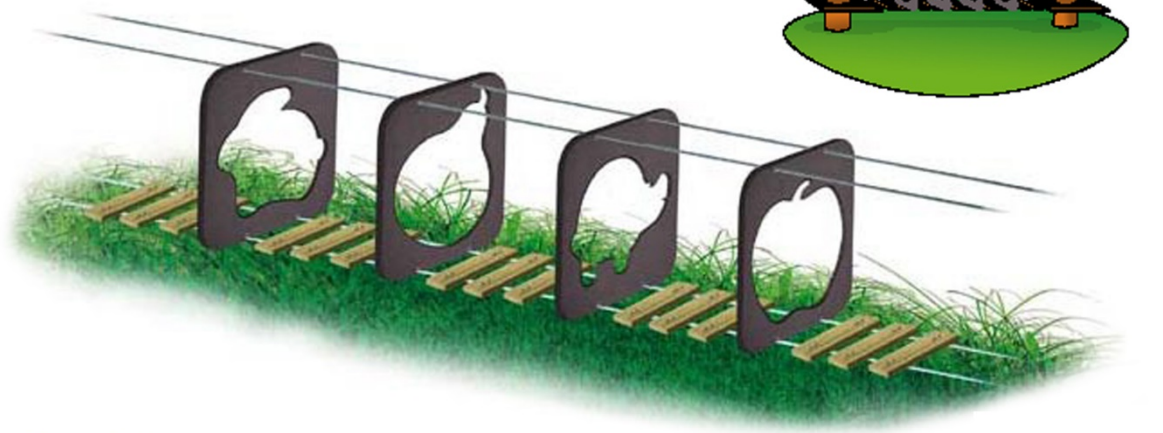

Description


Exterior plywood for outdoor, fixed on 4 wire cables. Format 1,10 x 1,10 m, Thickness 15 mm.

We propose you different themes

趣味島嶼板

These wooden planks are a fun and educational game designed to enrich children's knowledge by discovering the forest: animal tracks, foliage, birds, etc...

Laser engraving on Iroko wood.

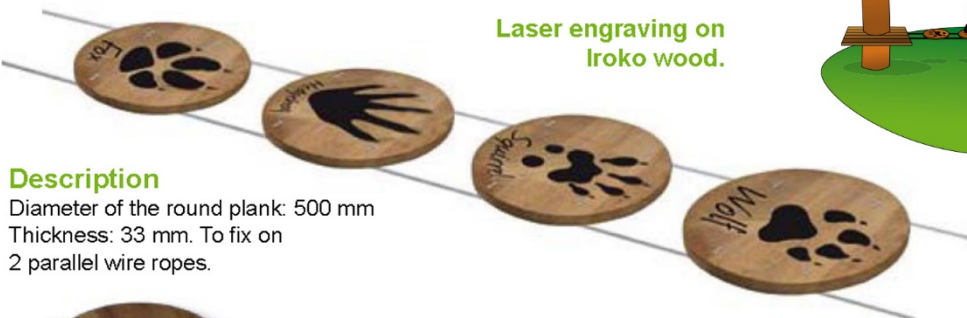

Description

Diameter of the round plank: 500 mm
Thickness: 33 mm. To fix on 2 parallel wire ropes.



笑臉橋

Foam obstacle covered with a PVC tarpaulin, equipped with fixing eyelets in the upper part. The smiley is an adhesive stuck on the tarpaulin.



■ Color green.

■ Dimension: 1 m x 1,50 m.

木 板 橋

Banana form

Non-slip wood - Length 500 mm - Thickness: 15 mm
With assembly accessories.

Playful
and
fun for
kids

Various
forms for
your game
modules



木 島 橋

Apple, Pear, Fish, Rabbit, Turtle forms

Non-slip wood
- Thickness:
15 mm With
assembly
accessories.



Hanging bridge Apple and butterfly forms

Non-slip wood - Thickness: 15 mm
Supplied with 4 suspensions color
green or beige in rope Ø 16 mm and
reinforced loop and ring suspensions
at the top.



吊床



Nest (swing)

- Polyethylene meshes, waterproof.
- Black rope with PP parts, color black.
- Color black/Apple green.

飛行地毯


Grooved planks

- Treated Timber class 4.
- Equipped with suspension ropes Ø 20 mm.
- With reinforced loop and ring suspensions at the top (To be assembled in a sawtooth fashion).

Thickness: 29 mm. **Width:** 145 mm.

Full length: 1,50 m.

Length between ropes: 1,30 m.

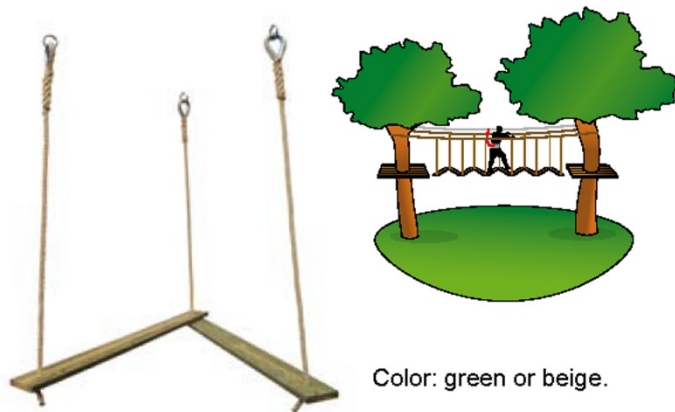


Color: green or beige.

西藏橋



Made with a walking rope in textured polypropylene Ø 30 mm, equipped with suspension ropes every 0,5 m textured polypropylene Ø 20 mm with reinforced loop and ring suspension.

地獄橫斷

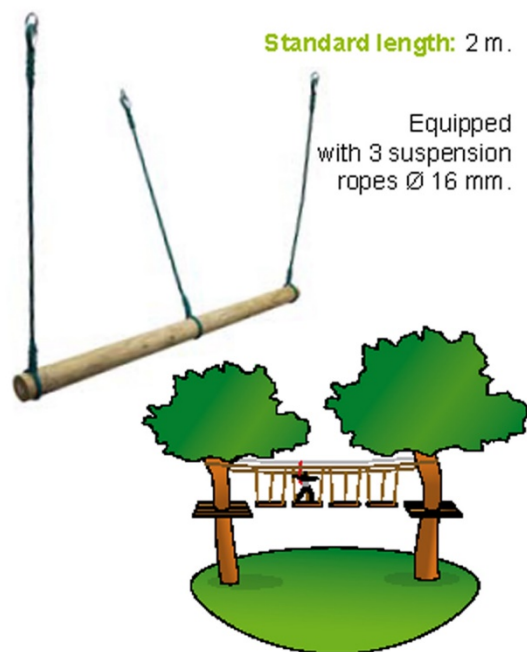


Log \varnothing 100 mm

Treated Timber class 4. With reinforced loop and ring suspensions at the top. Color: green or beige.

圓木飛人



Standard lengths:
0,66 m ■ 1,33 m ■ 2 m.

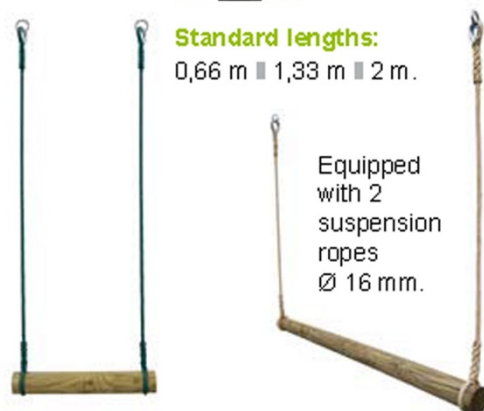

橫 渡 爬 板



Plank height: 2 m.
Spacing of wire ropes: 1,90 m.




Plank
Thickness: 29 mm.
Width: 145 mm.

- Treated Timber class 4.
- Equipped with 5 inserts, 2 climbing holds and the accessories to attach the plank to the 2 wire ropes.
- The planks should be placed every 0,50 m or every 1 m.


橫 渡 攀 岩 板

Climbing wall made with planks class 4 and provided with inserts and with a set of climbing holds.

■ Module dimensions: 2 m x 3 m.

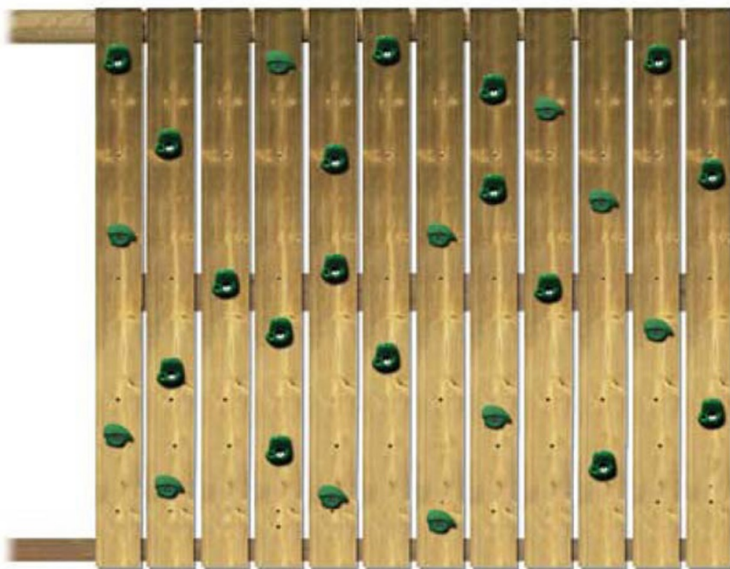

*Possibility to connect them with a connecting part **

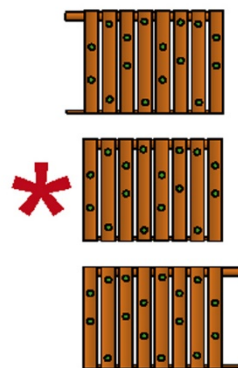

移動圓木



Standard lengths:
1,50 m ■ 2 m.



Log Ø 100 mm

- Treated Timber class 4.
- Equipped with 4 suspension ropes Ø 16 mm.
- With reinforced loop and ring suspensions at the top.
- Color: green or beige.

雙十圓木橋



Standard length:
2 m.

Necessary accessories
to attach the logs together.



垂懸十字橋



Log: 1,33 m
Ø 100 mm.

- Treated Timber class 4.
- Equipped with 4 rope suspensions Ø 16 mm.
- With reinforced rope and loop suspensions at the top. Color: green or beige.

鋪板橋



Grooved planks with logs:
length 0,66 m - Ø 100 mm

掛柱橋

Equipped with two suspension ropes \varnothing 16 mm.



Log \varnothing 100 mm

- Treated Timber class 4. Log length: 0,66 m.
- With reinforced loop and ring suspension at the top. Color: green or beige.



掛錨橋

Equipped with a suspension rope \varnothing 20 mm.



垂直圓木橋

Log Ø 120 mm

- Treated Timber class 4.
- Step attached to the log.
- Suspension rope Ø 20 mm with reinforced loop and ring suspension at the top.
- Color: green or beige.



Log length: 1,80 m.
Length with suspension: 2,50 m.



掛板橋

Disc Ø 400 mm

- Non-slip.
- Textured polypropylene rope Ø 20 mm.
- With reinforced loop and ring suspension at the top.



短 跳 橋


2 logs Ø 100 mm

- Treated Timber class 4.
- Equipped with a non-slip disc Ø 600 mm.
- Necessary assembly accessories.



Hand rope

textured polypropylene Ø 20 mm with reinforced loop and ring suspension at the top and a reinforced grip at the bottom.

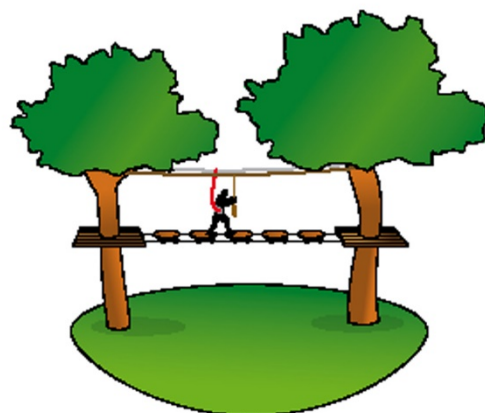


We can also supply circular non-slip discs.

Available diameters:

Ø 400 ■ 600 ■ 800.

Thickness: 15 mm.

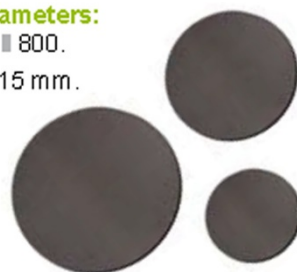

輪 轉 階 梯

Bars Ø 40 mm in staggered rows.
Space between bars: 40 cm.



90 x 90 mm
Square structure.
Available lengths:
2,20 m / 3 m / 4 m



鸚 鵡 攀 梯

Space between
bars: 45 cm.

Available lengths:
2 m / 3 m / 4 m

Log Ø 120 mm
with wooden bars
Ø 40 mm in
staggered rows.



漁夫的航程



Rope Ø 100 mm, in textured polypropylene provided with 2 different lengths of suspension fixed every 1,50 m.

■ Child course: suspension 1,50 m and 1,80 m.

■ Adult course: suspension 2,50 m and 2,80 m.



猴子橋

Rope Ø 20 mm



繩橋

Rope Ø 16 mm

Standard length: 0,56 m.



Reinforced suspension loops and rings at both ends. Color: green or beige.

單結繩梯

Textured polypropylene rope Ø 20 mm

- Knot every 30 cm.
- Reinforced loop and ring suspension at the top.
- Reinforced grip at the bottom.



垂直爬梯

Two textured polypropylene ropes Ø 30 mm.

- Reinforced loop and ring suspension at both ends.



These ropes are equipped with a ring Ø 200 mm placed in a staggered fashion every 0,66 m and knotted into the rope.



繩 梯

Wooden bars Ø 32 mm
and rope Ø 16 mm

- With reinforced loop and ring suspensions at both ends.



Color: green or beige.



泰 山 跳

Polypropylene textured
rope Ø 30 mm

- Reinforced loop and ring suspension at the top.
- Reinforced grip at the bottom.

We can fix guides onto the rope for the implementation of safety measures.




捻 橋

Hand rope

Anti-vandalism steel rope Ø 16 mm.

- equipped with a swivel hook.
- Suspension ring.
- Color: black.

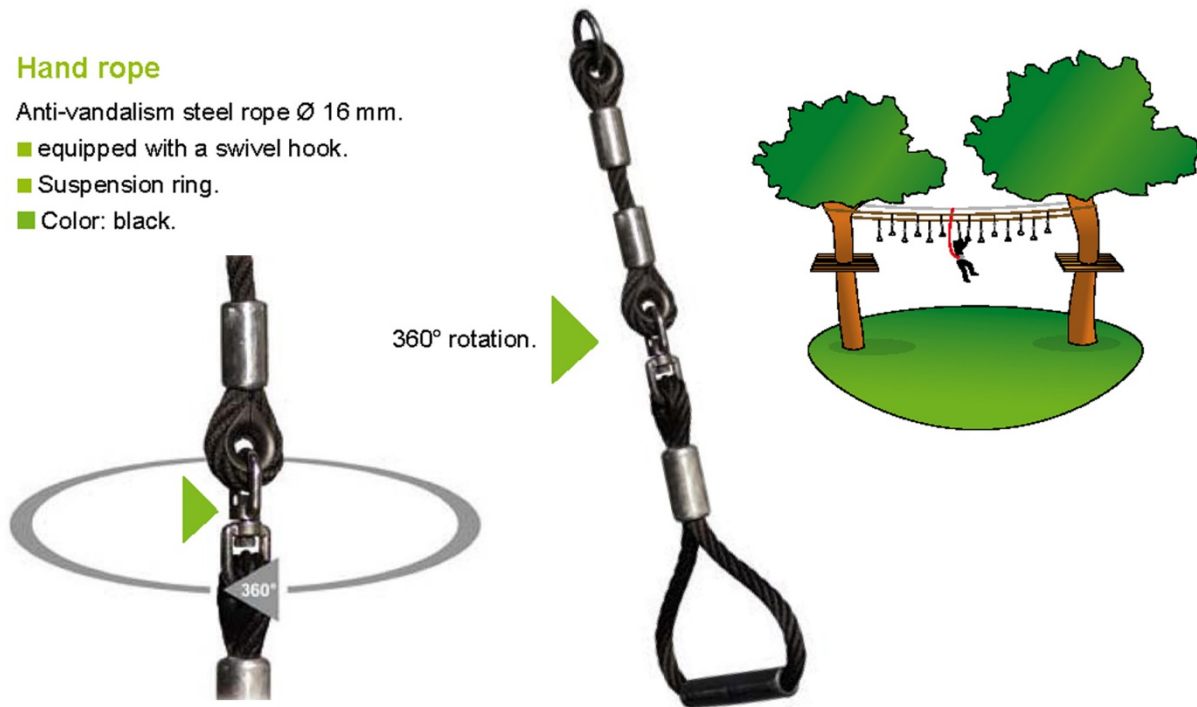

繩環橋

Reinforced loop and ring suspension at the top.



**Ring Ø 200 mm
at the bottom for hands.**

- Suspension rope Ø 16 mm.
- Color: green or beige.



馬鐙橋

Reinforced loop and ring suspension at the top.




Galvanised steel stirrups

- Suspension rope Ø 20 mm.
- Color: green or beige.



滑 道

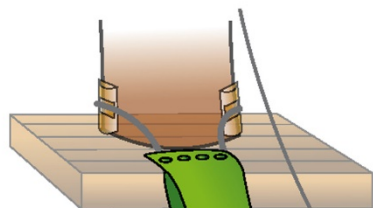

Width: 1 m.



Polyester Tarpaulin

- PVC coated.
- 900g/m² with a slit on either side for insertion of the wire rope.
- A flap with eyelets at the top for attaching it to the platform.
- Color: green.

上升滑索


We offer you a new solution to reach the upper platform for an obstacle change.

To move easily

Composed by :

- 2 splices with thimble in a ring connected to a pulley by a swivel.
- Anti-slip seat board connected to 2 x Ø 100 mm logs treated autoclave class 4.
- Spreader log.
- Polypropylene ropes (similar to natural hemp) Ø 16 mm.
- Central splices.

Dimension ground
80 x 80 cm.
height: 2,10 m.

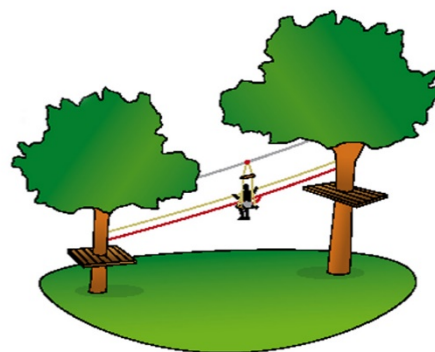


兒童滑索

Galvanized steel hanging chain with a black PVC sheath.



Rubber disk.

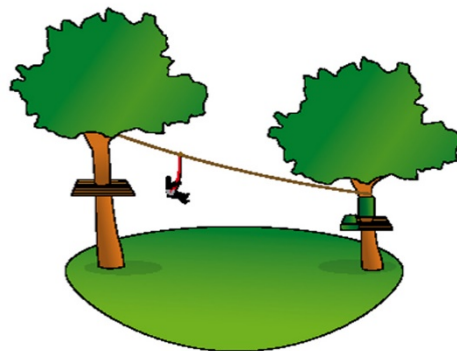

Don't forget the following PACK:

Pulley and Safety Screw-Lock carabiner.




籃子滑索



For
children

Swing

- Soft ring.
- Polypropylene parts, color black.
- Suspension rings and galvanized steel rings (in the shape of a 8).
- Oval. Color green/black.

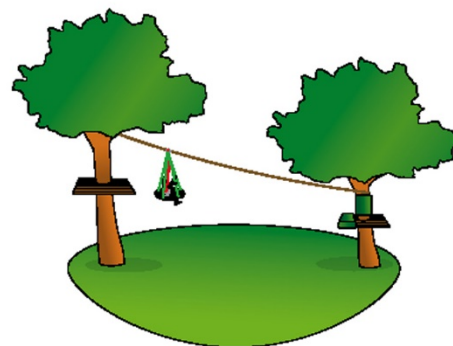

Don't forget the
following **PACK**:

Pulley and Safety
Screw-Lock carabiner.



高 空 摩 托 車

Steel Kick Scooter equipped with 4 pulleys tandem speed on the floor part and one on the top part.

■ Color: grey.

■ Adjustable. Maximum: 2,50 m.

Trail exclusively
for small
children

Non-slip floor

2,50 m




Pulley Tandem speed



衝浪板

Oscillating on springs

- 1 textured polypropylene rope suspension
Ø 30 mm with reinforced loop and ring
at each end.
- Non-slip board.
- 1 oscillating system.
- 4 pulleys Tandem Speed.
- 4 quick links.

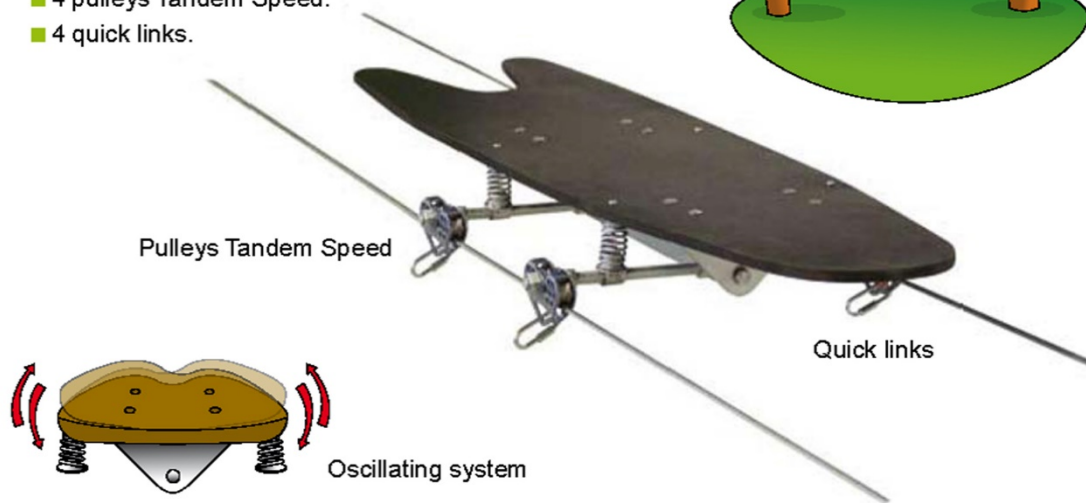

空中飛人 平衡桿

Wooden trapeze Ø 16 mm

- Reinforced loop and suspension rings at the top.




Steel bar Ø 34 mm

- Connected at the top with a ring.



Equipped with 2 suspension ropes Ø 16 mm.
Color: green or beige.

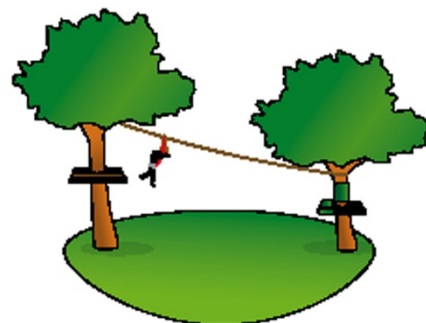

擺動浮標

Buoy (swing)

- Suspension rings and galvanized steel rings (in the shape of a 8).
- Polypropylene adjustable suspension rope Ø 12 mm: from 75 cm to 1,50m.
- Polypropylene parts, color black
- Supplied with a valve. Not inflated.
- Color red.



Don't forget the following PACK:
Pulley and Safety Screw-Lock carabiner.




滑索球

Coconut fiber ball Ø 350 mm

- Equipped with a textured polypropylene suspension rope Ø 30 mm.
- Reinforced loop and ring suspension at the top.

Rope length: 2,40 m.

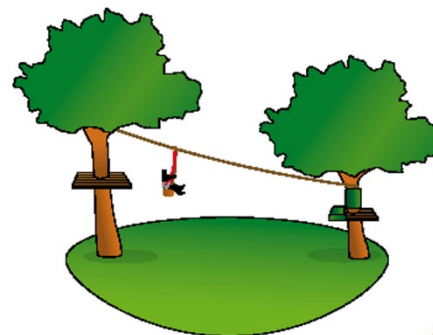


飛狐滑索

Textured polypropylene rope Ø 30 mm

- Rope loop 200 mm at the bottom.
- Reinforced loop and ring suspension at the top.

Length: 1 m.

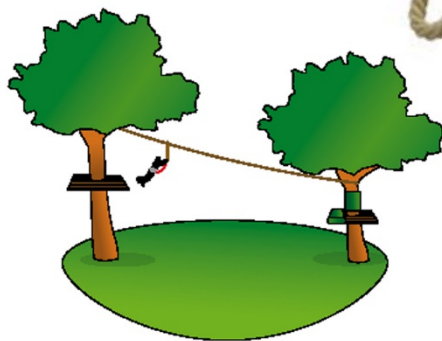


握把滑索

- Hot-dip galvanized.
- Equipped with 2 non-slip handles.
- Protective foam in the middle.



鐵道式探索

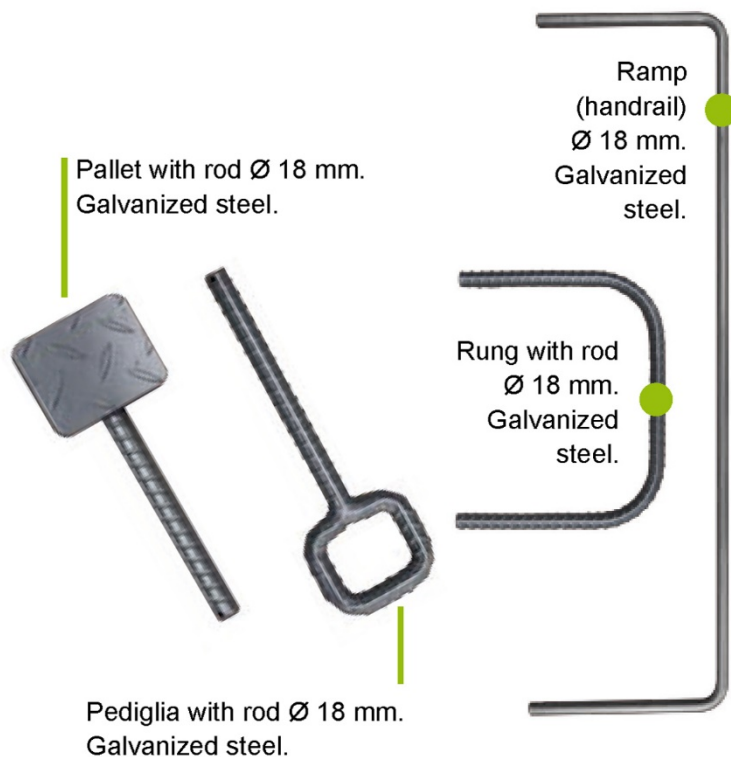

We also provide the necessary equipment to help to fix climbing aids in the rock:

Chemical mortar, Handgun, Drill Ø 20 mm x 210 mm.

鐵道式攀登



野 外 廁 所



Dimension floor surface:

1,10 m x 1,10 m.

Opening:

180° (width = 1,10 m).

Seat:

45 cm from
the floor.

Height:

2,40/2,20 m.



25 liter wood sawdust.

Sawdust
scoop.



PVC basin.

5 single-use
biodegradable bags.

Raised floor to facilitate transportation and lifting.



Door with locking.



Bamboo toilet lid and
lateral sawdust tray.



Easy accessible opening.

自由落體

Free Fall Device

The free fall device QUICKjump gives riders an exciting and unique free fall experience while safely lowering them to the ground.


Flexibility

Simply to install and easy to relocate. Compact modular unit designed to be hung from a top anchor. High throughput: 90 people per hour.

Seguridad

The device has a reliable self-regulating braking system and has minimal variation in the descent rate of a child (at 35 lb/16 kg min.) and an adult (at 285 lb/130 kg max).

Magnetic
Braking
Technology

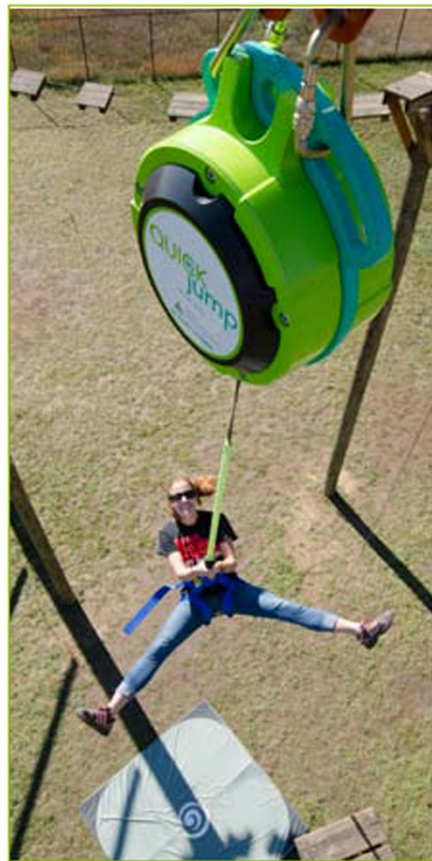

滑 降 制 動

Self-regulating magnetic braking system for zip-lines

The key advantages of the system

- Eddy current braking technology.
- Wide range of rider weights and speeds.
- Controlled braking distance.
- Low operational cost.
- Low maintenance costs.



The zipSTOP brake (A) is connected to the brake trolley (B) through a pulley system. As the rider trolley (C) makes contact with the brake trolley, the zipSTOP brake creates a safe and comfortable deceleration for the rider.



攀 岩 確 保 器

The next generation of indoor and outdoor climbing wall auto belays.

Advanced technology

Smooth descent with minimal variation in descent rate of a child and an adult.




Safety

No clutch bearing, eliminating a key point of failure present in other auto belay designs.

Flexibility

Simple to install and easy to move to accommodate group programming. Descent height of 41 feet (12,5 meters) provides the longest range of all modular systems. Accommodates a wide range of climber weights from 22 - 330 lbs (10 to 150 kg).

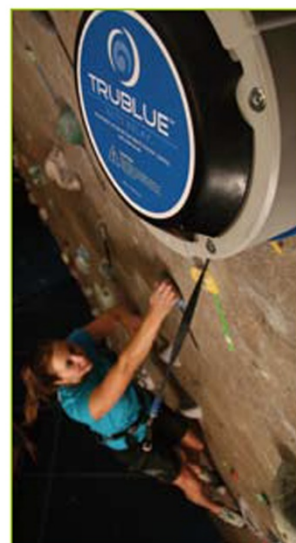

安全裝備



Picchu helmet
For children.

Dynapark
Y shaped safety lead
in a dynamic rope
with sewn ends
for acrobatic courses.




Elios helmet
For adults.



Aero Park IV
It is easy to slip into
and is adjustable
for children and
for adults.

Bambi
A simple and
practical harness
for kids aged 5 to
10 and weighing
less than 40 Kg.

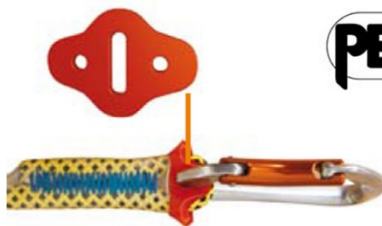

Pinch
System for securing
a carabiner at the
end of a rope or
tape lanyard.



Sling (Beal)
Flat sling
Basic 18 mm.
Length: 30 cm
to 1,75 m.

安全裝備

Spiral marking

High density spiral marking for cables with 9 - 13 mm diameter.

■ red ■ blue



We can also provide transparent skirting tubing for your suspensions or ropes to protect them from abrasion.

Elastic strap

Ø 9 mm

Reel: 100 m.
Color: black



Abseiling rope

Diameter: 4 mm.
Reel: 100 m.



Semi-static rope

Available diameters:

9 ■ 10 ■ 10,5 ■ 11 ■ 11,5 mm.



安全裝備



Alveo vent
Lightweight ventilated helmet.



Falcon
Lightweight
seat harness,
comfortable
and durable.



Cordex
Lightweight
gloves.



Top
Torso
harness
shorts.



Gradistep
Bracket to
help people
in difficulty.



Spatha
Multi-purpose knife.

安全裝備



Snap Hook Spirit

Snap Hook Vertigo



Pulley TRAC

A pulley for zip-lines combined with the Vertigo carabiner.



Déval' Câble pulley

For adults and children

- Easy to use.
- Plastic wheels
- Quiet - pulley don't wear the wire rope out.

Option

Magnetic system for easy use at the waist.



Pulley buffer Déval' Câble (softens impacts)



Tandem Speed

It is the fastest moving pulley. It is specifically designed for Zip games with gentle slopes.



Gloves for Tree Top

Adventure Parks

For children: one size.
For adults: size 8 and 10.

